


## SkySpec 1D Instrument v.210

FAST, ACCURATE AND MOBILE SPECTRAL OBSERVATIONS OF SCATTERED SUN LIGHT



*Spectrometer and telescope units*

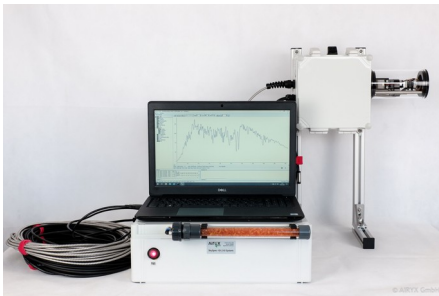

*Mast mount*



*Tripod mount*

The SkySpec instrument series allow users to perform fast, efficient and reliable atmospheric observations with the passive DOAS (*Differential Optical Absorption Spectroscopy*) method (according to VDI standard 4212). These measurements provide information on the tropospheric (and stratospheric) distribution of various trace gases, e.g. NO<sub>2</sub>, SO<sub>2</sub>, formaldehyde, and aerosols. Also other high precision spectroscopic applications are possible.


The **SkySpec-1D** consists of a spectrometer unit housing two spectrometers and the electronics for installation in the lab. The separated telescope unit is connected via glass fibre, power and data cables (typically 10 m) and is installed outside. This setup guarantees optimum stability and spectral data quality. The instrument is operated by an external PC connected over USB. The use of two spectrometers allows a broader spectral range (UV and

visible) measuring more trace gases and aerosol properties while achieving a high spectral resolution and avoiding spectral under-sampling (with FWHM > 5 pixel). The covered spectral range and resolution of the instruments can be adapted to the needs of the user. The ultra-low stray light spectrometers are temperature stabilized with an accuracy of 0.02 °C to allow stable and reliable spectral data.

The prism telescope can measure in a range from -10° to 190° and includes an inclination sensor with automatic elevation adjustment. This allows fast deployment without the need for levelling the instrument and even elevation correction on moving platforms. The telescope has no outside moving parts which guarantees a long life system and operation also at hard environmental conditions (e.g. snow). The integrated telescope heating activates below 5 °C and avoids snow and ice on the optics.

### APPLICATIONS

- Passive DOAS especially MAX (Multi Axis) - DOAS measurements
- Air quality monitoring and trace gas measurements in urban, rural, polar, and pristine environments
- Vertical profiles of NO<sub>2</sub>, SO<sub>2</sub>, HCHO, aerosol optical depth
- Long term measurements with low maintenance
- Emission monitoring of power plants, industrial complexes or volcanoes
- Scientific studies involving measurements of NO<sub>2</sub>, SO<sub>2</sub>, HCHO, HONO, Glyoxal, BrO, IO, Ozone
- Zenith Sky measurements for stratospheric measurements of Ozone, NO<sub>2</sub>, BrO
- Spectral analysis of surface reflection
- application on moving platforms (e.g. ships, air planes)

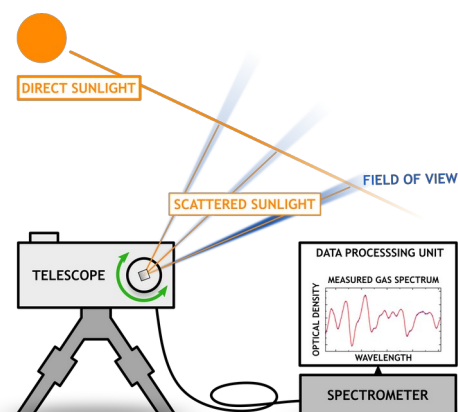

Scheme of SkySpec1D measurement geometry and principle.

## PROPERTIES (TYPICALLY)

Spectrometer specifications (typ.) <sup>*1,2</sup>	Conf.	Range[nm]	FWHM [nm]	Filter	Additional sensors: Temperature Pressure Humidity	
	UV-I	300-405	0.45	BG3		location ambient telescope spectrometer electronics
	UV-II	300-460	0.6	BG3		
Vis	420-565	0.6	BG40			
Noise	10 <sup>-4</sup> at 1000 scans ( -60s int. time)					
Quantum efficiency	UV: 60% with back thinned detectors Vis: up to 80%				Measurement software	Included, customizable measurement routine (angles, time resolution)
Spectrometer temperature stability	20°C, adjustable ± 0.02°C				Start-up time	< 2 min
Wavelength calibration	Build in mercury (HG)-lamp or manually (optional)				Data communication	USB 2.0
Operation temperature range (telescope unit)	-30°C to 50°C				Power consumption	Typ. < 30 W (max. 100W), 12 V
Elevation range, accuracy	-10° to 190°, 0.2° automatic elevation correction				Weight	~ 13 kg
Vertical field of view	~ 0.3°				Size spectrometer unit	40 x 35 x 13 cm <sup>3</sup>
					telescope unit	37 x 23 x 13 cm <sup>3</sup>
					Telescope mounting options	Wall mount, tripod or mast
					Mechanical stability	Robust for harsh environmental conditions water proof (IP 67)

### COMMENTS:

<sup>\*1</sup> Spectrometers are equipped with colour filters to reduce stray light, <sup>\*2</sup> Custom specifications with different wavelength ranges are possible

## OPTIONAL COMPONENTS & CONFIGURATION

- Custom spectrometer configuration and systems with only one spectrometer
- Integrated image camera (view 0° to 90° elevation)
- Integrated mercury (HG) wavelength calibration lamp system and shutter
- Fibre and cable length of 15 or 20m.
- Telescope mounting frame / tripod + adapter
- Spare parts and maintenance set
- Pre-configured measurement PC (Notebook / Desktop)
- Spectral data analysis package
- Online installation and support service

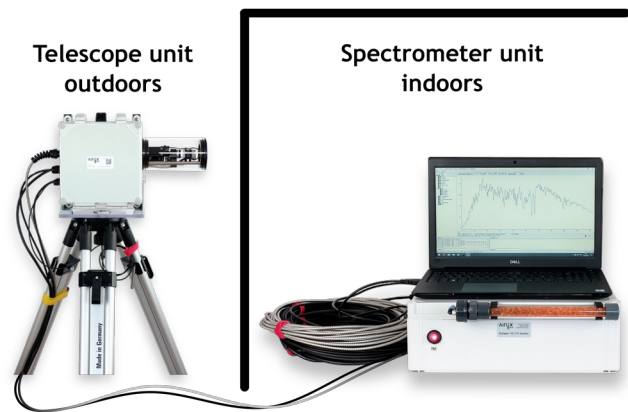


Illustration of setting up the SkySpec1D.

## ADVANTAGES

### BENEFITS

#### High measurement accuracy

### INNOVATION

- Coverage of large spectral range with high spectral resolution (no undersampling)
- Ultra-low stray light spectrometers
- Stable spectrometer temperatures, low noise
- Non-linear spectrometer characterization included
- Continuous measurement and fast automatic correction of telescope elevation
- Small telescope field of view (FOV)
- Measurement routine adaptable

#### Simple setup & operation

- Simple instrument setup and start up
- Fast, accurate and reproducible due to built-in inclination sensor
- Low maintenance, easy cleaning of optics

#### Long lifetime

- No moving parts on the outside
- Water proof with IP67
- Designed for long term operation
- Spectrometer drying unit to avoid water condensation

DATED: 09/03/2021 | ©2021 AIRYX GMBH. ALL RIGHTS RESERVED. JUSTUS-VON-LIEBIG-STR. 14, 69214 EPELHEIM/HEIDELBERG/GERMANY, AIRYX.DE